


P/N	APPLICABLE NOTE(S)
BASIC	
SF	
CC	1
CCSF	1

REVISIONS				
ZONE	REV.	DESCRIPTION(S)	DATE	BY
-	C	ECO 19617	10.02.06	P.MAO

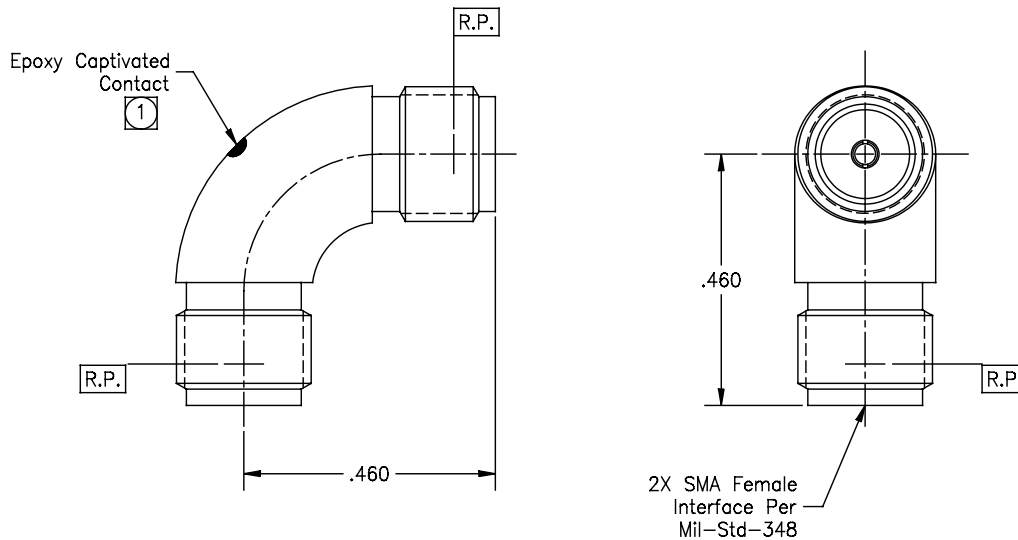

Note(s):

1. Epoxy is required only on Part No.'s 5095CC and 5095CCSF.

DRAWING NO.	5095	REV.	C
-------------	------	------	---

MATERIAL(S):	ELECTRICAL(S):	MECHANICAL(S):	ENVIRONMENTAL(S):
Body: 304 sst per MIL-T-8504 or SAE-AMS-5567. Center Conductor: BeCu alloy per ASTM B-196. Dielectric: PTFE per ASTM D-1710. Epoxy: **Sigma VF type HV. ** Not applicable to Part No.'s 5095 & 5095SF.	Impedance: 50 Ohms nominal. Frequency Range: DC to 18.0 GHz. VSWR: 1.05 + .005 X f(GHz). Insertion Loss: .03 √f(GHz). Working Voltage: 335 Vrms max @ sea level. Dielectric Withstanding Voltage: 1,000 Vrms min. R.F. HiPot Voltage: 670 Vrms min @ 5MHz. Corona Level: 250 Vrms @ 70,000 ft. Insulation Resistance: 5000 MegOhms min. R.F. Leakage: -(65 - fGHz) dB (For CC & CCSF's). R.F. Leakage: -(90 - fGHz) dB (For BASIC & SF's). Contact Resistance: Before Environmental: Center Contact: 3.0 Milliohm max. Outer Contact: 2.0 Milliohm max. After Environmental: Center Contact: 4.0 Milliohm max. Outer Contact: NA.	Mating Characteristics: Interface per Mil-Std-348. Force To Engage & Disengage: Torque: 2 inch-pounds max. Longitudinal Force: NA. Center Contact Retention: Axial Force: 6 pounds min. Connector Durability: 500 cycles min @ 12 cycles/minute max. Permeability: Less than 2.0 mu. Center Contact Captivation: **Axial Force: 6 pounds min. **Radial Torque: 4 inch-ounces min. ** Not applicable to Part No.'s 5095 & 5095SF.	Temperature Range: -65°C to +165°C. Thermal Shock: Mil-Std-202, Method 107, Test Cond. A. Moisture Resistance: Mil-Std-202, Method 106, Insulation resistance at least 200 MegOhms within 5 minutes after removal from humidity. Corrosion: Mil-Std-202, Method 101, Test Cond. B. Vibration: Mil-Std-202, Method 204, Test Cond. D. Shock: Mil-Std-202, Method 213, Test Cond. I.

FINISH(ES):
Body: (For SF & CCSF's): Passivate per ASTM A-967. (For BASIC & CC's): Gold plate per ASTM B-488, over nickel plate per SAE-AMS-QQ-290. Center Conductor: Gold plate per ASTM B-488, over nickel plate per SAE-AMS-QQ-N-290.

APPLICABLE TENSOLITE DOCUMENTS		
WORK STD	PROD INST	ASSY INST
NA	NA	NA

TOLERANCES AND NOTES EXCEPT AS NOTED	
DIMENSIONS ARE IN INCHES.	
LINEAR .0005 .0005 ANGULAR ± 1/2°	
FRACTION ± 1/32	
1. MACHINE FINISH: $\frac{63}{\text{RMS}}$	
2. BREAK ALL SHARP EDGES .005 MAX.	
3. MACHINED FILLETS .005 MAX.	
4. MACHINED SURFACES SQUARE TO RESPECTIVE AXIS WITHIN .005 INCHES PER INCH.	
5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 TYP.	
6. DIMENSIONS TO BE MET BEFORE PLATING.	
7. CHAMFER ALL THREADS 45°.	
8. THREADS PER 11-26.	
9. REMOVE FRAYED EDGES ON TEFLON.	
10. REMOVE ALL BURRS.	

NOTICE
 THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED BY TENSOLITE COMPANY AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIED PURPOSE AND THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT TO DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON OR TO INCORPORATE IN OTHER PRODUCTS ANY SPECIAL FEATURES PECULIAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY TENSOLITE COMPANY, LONG BEACH, CALIFORNIA 90815.

MATERIAL		SIZE	SPECIFICATION	PROCUREMENT
NEXT ASSY		Tensolite HIGH PERFORMANCE CABLES & INTERCONNECT SYSTEMS Long Beach, California 90815		
APPROVAL INITIALS	DATE	TITLE		
DRAWN BY JF	11.12.04	SMA FEMALE TO SMA FEMALE RADIUS RIGHT ANGLE ADAPTER		
CHECKED P.MAO	10.02.06	SCALE	SUB-DIRECTORY/FILENAME	
QUALITY		6:1	OL\	SHEET 1 OF 1
ENGINEERING P.MAO	10.02.06	SIZE	CASE CODE	DRAWING NO.
PM	10.02.06	C	30990	5095
				REV. C