

SPECIFICATION SHEET

JFW MODEL 50R-124

ROTARY ATTENUATOR

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range DC-2500 MHz

Impedance 50 Ohms nominal

Attenuation Range 0-70 dB in 10 dB steps

VSWR 1.4:1 maximum

Insertion Loss 0.5 dB maximum

Attenuation Accuracy ± 0.5 dB or 2.5%
(whichever is greater)

RF Input Power 2 Watts average

Direction of Rotation Attenuation increases in a Clockwise
direction

Indexing 30 degrees with stops at
Minimum and maximum

RF Connector SMA, N, TNC or BNC female





Operating Temperature Range -20°C to +85°C

Lifetime 500,000 attenuation steps


Knob/Panel Mounting Drawing 092-8435-01


Outline Drawings 092-428-01 (50R-124 BNC)
092-428-03 (50R-124 N)
092-428-07 (50R-124 SMA)
092-4166 (50R-124 SF/SF RT)

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
9999	04/23/2003	C	TRS 05/15/2007	18362	03/05/2010	F	TRS 03/05/2010
17378	07/02/2009	D	TRS 07/02/2009	25776	09/29/2015	G	TRS 09/29/2015
17854	11/04/2009	E	TRS 11/04/2009	28157	10/05/2017	H	TRS 10/05/2017

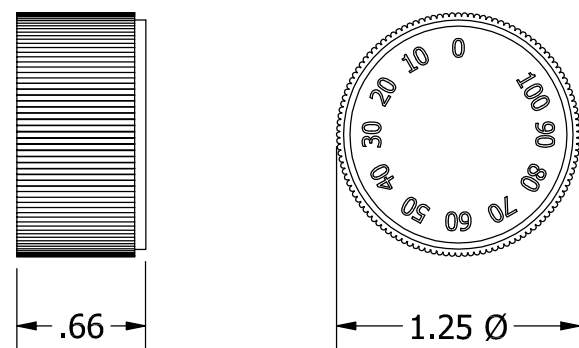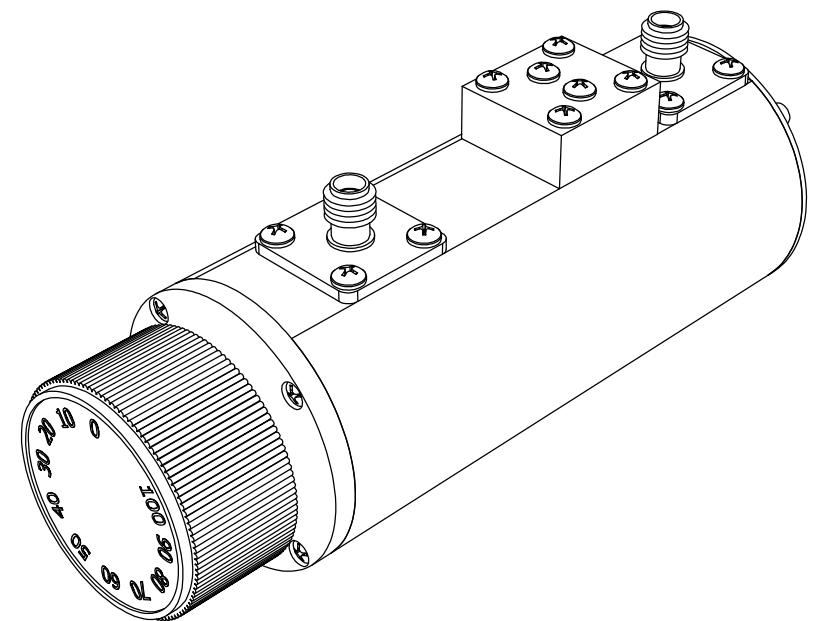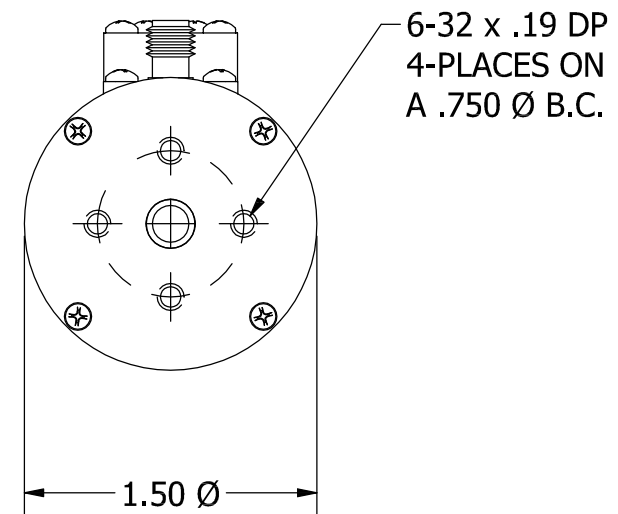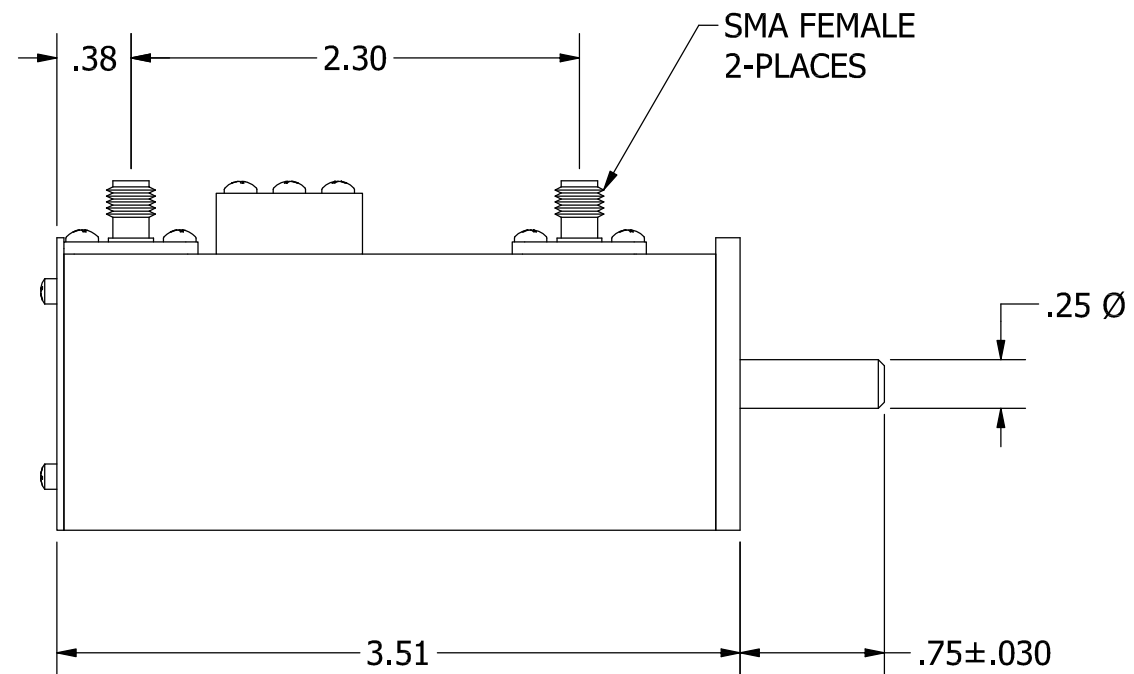


KNOB DETAIL



REV	ECN	DATE	BY	APPR		
-	ISSUED	2-10-95	CDJ	FDW	 JFW INDUSTRIES, INC. www.jfwindustries.com PH: 317-887-1340	
A	4581	3-1-95	TEZ	FDW		
B	4983	5-21-96	TEZ	FDW		
C	6532	12-11-00	CDJ	TEZ		
D	6750	6-11-01	CDJ	TEZ		
E	12635	4-20-06	ETW	TEZ		
F	24444	9-11-15	JZ	TEZ		
MATERIAL					ALUMINUM ALLOY	PROPRIETARY INFORMATION
FINISH					CHEMFILM TCP	ALL SURFACES ARE TO BE FREE OF BURRS, PITS & SCRATCHES
MODEL					50R-XXX	SCALE FULL TOLERANCES .XX±.010 .XXX±.005 XX°±.5°
DESCRIPTION					0-100 dB ROTARY ATTEN.	DWG # 092-2275

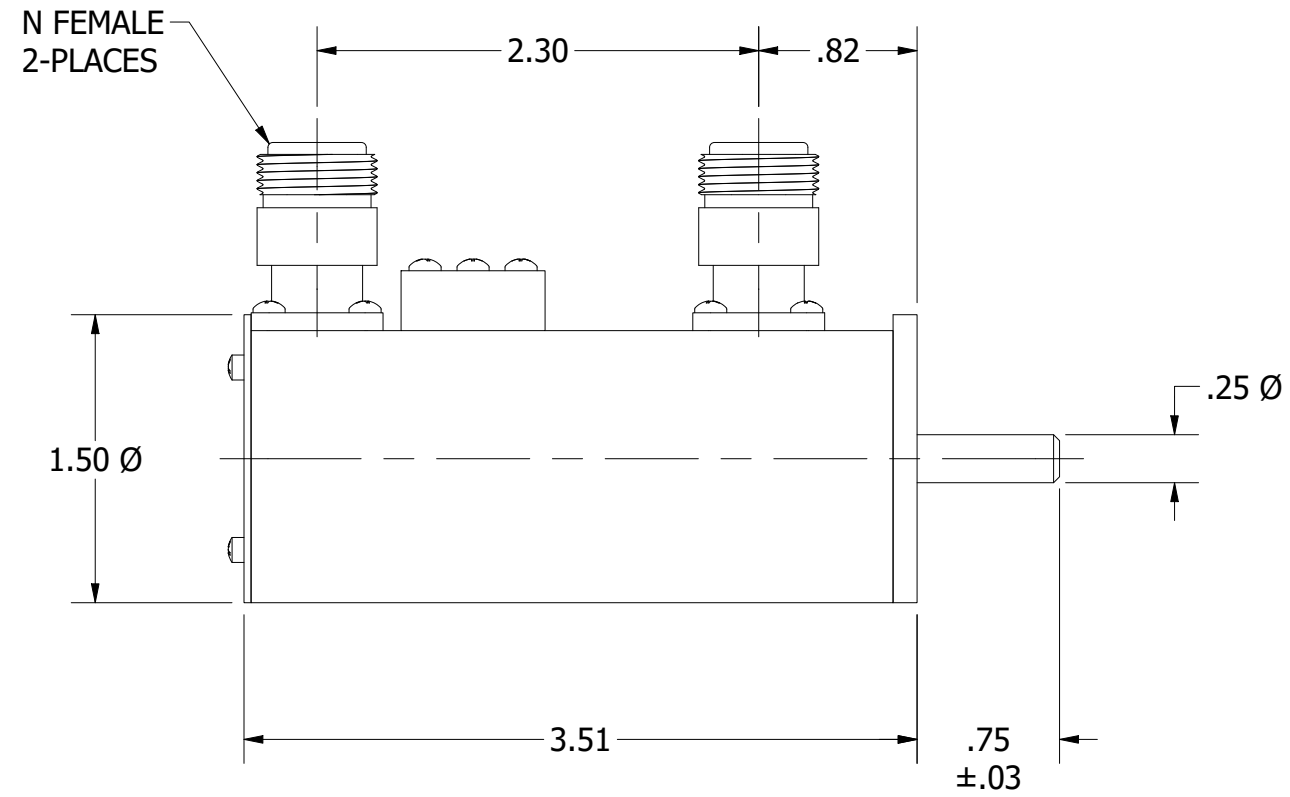


6-32 x .19 DP
4-PLACES ON
A .750 Ø B.C.

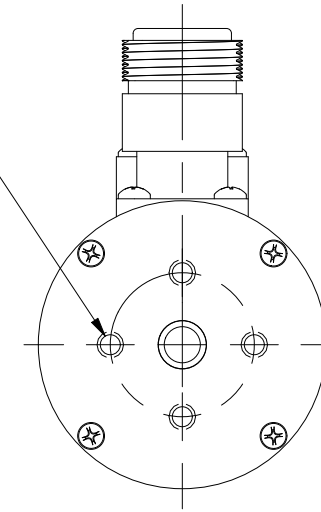

KNOB MARKED PER UNIT
0-100 dB x 10 dB SHOWN

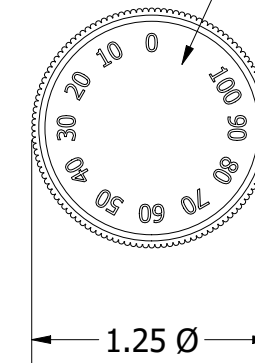

KNOB DETAIL

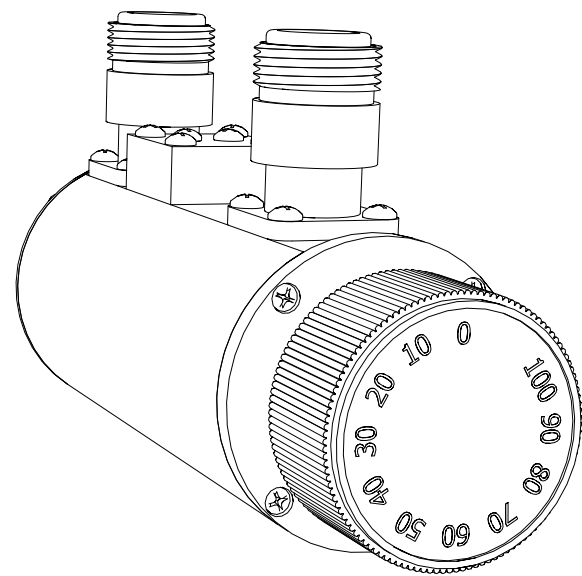

REV	ECN	DATE	BY	APPR
-	ISSUED	6-10-09	BZ	TRS
A	24444	9-17-19	GM	TEZ




JFW INDUSTRIES, INC.


www.jfwindustries.com

PH: 317-887-1340

MATERIAL	ALUMINUM ALLOY	PROPRIETARY INFORMATION
FINISH	CHEMFILM TCP	ALL SURFACES ARE TO BE FREE OF BURRS, PITS & SCRATCHES
MODEL	50R-XXX	TOLERANCES .XX±.010 .XXX±.005 XX°±.5°
DESCRIPTION	ROTARY ATTENUATOR	DWG # 092-6200-03

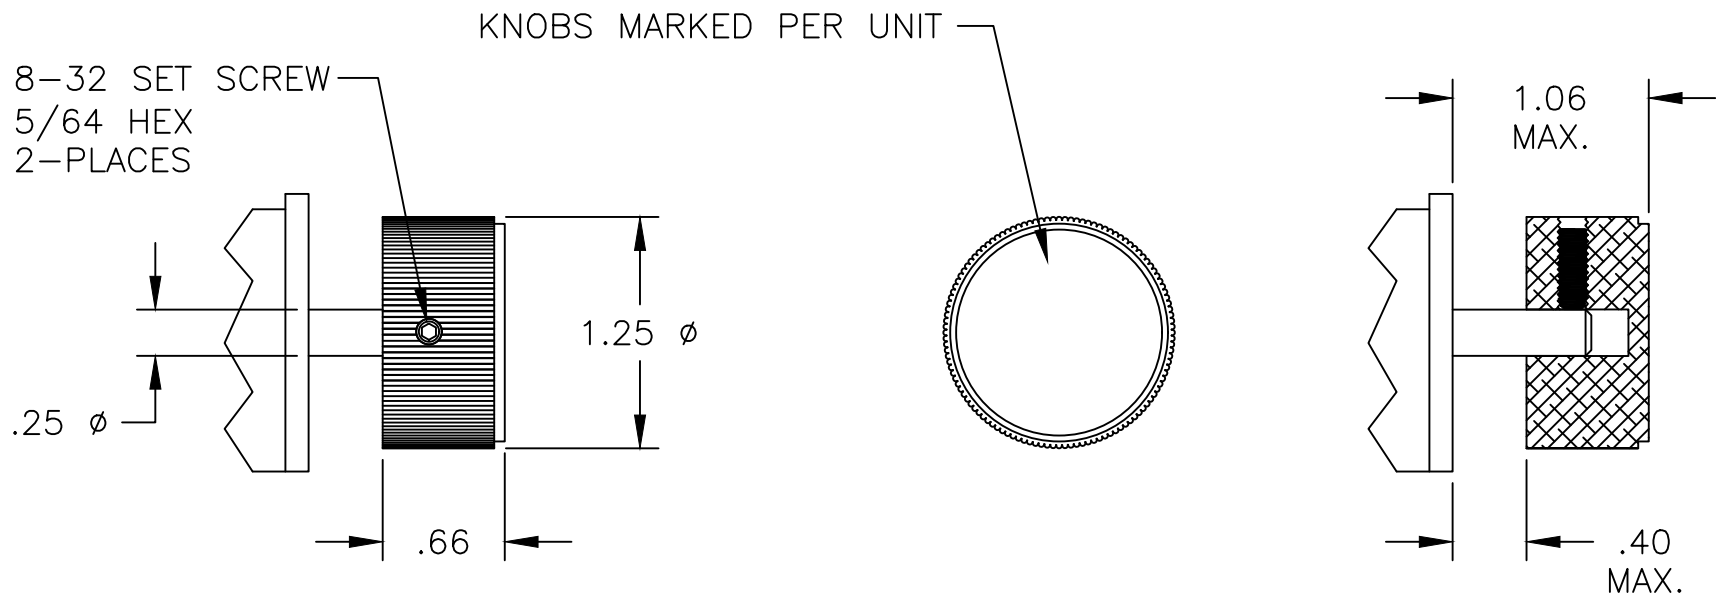

NOTE: PANEL THICKNESS IN ADDITION TO SCREW HEAD MUST NOT EXCEED .40 MAX.

REV	ECN	DATE	BY	APPR	 JFW INDUSTRIES, INC. www.jfwindustries.com PH: 317-887-1340	
-	ISSUED	9-24-15	JZ	TEZ	MATERIAL PLASTIC / ALUMINUM INLAY FINISH BLACK / CLEAR MODEL 132-001 DESCRIPTION ROTOR KNOB MOUNTING	
A	30055	12-10-19	JZ	TEZ		
					SCALE	FULL
					PROPRIETARY INFORMATION ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES TOLERANCES .XX±.010 .XXX±.005 XX±.5' DWG # 092-8435-01	