



P653-1CC Carlisle Interconnect Technologies

Buy Now



Looking for a discount?

Check out our current promotions!

Give us a call

1-855-837-4225

International: 1-415-281-3866

Email Us

Sales and New Orders: <u>sales@verical.com</u>


Order Support: support@verical.com

Suppliers: Visit our seller page

Company Address

Arrow Electronics, Inc 9201 East Dry Creek Road Centennial, CO 80112

This coversheet was created by Verical, a division of Arrow Electronics, Inc. ("Verical"). The attached document was created by the part supplier, not Verical, and is provided strictly 'as is.' Verical, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

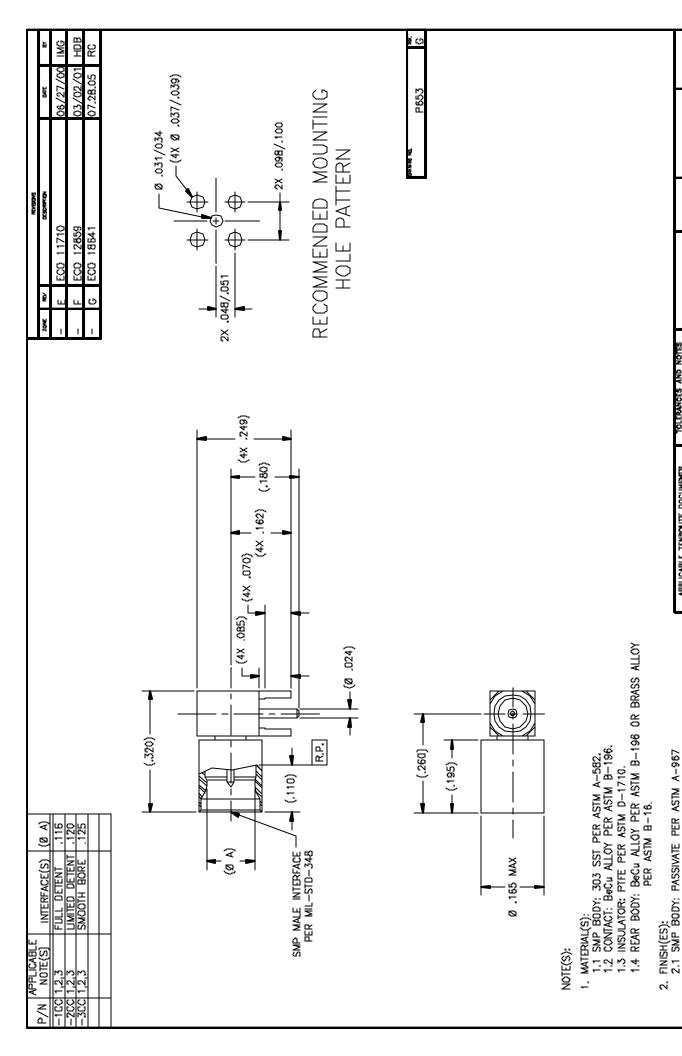

P653

WO

A WOUND FLOW.

A WOUND FLOW.

AND HAND PACKED STORM OF THE CONTROL OF THE CONTROL

HAVEL EMES OF TELLON.

SEE NOTE(S)

SEE NOTE(S)

ALC IN NOVEL XX ± District = 1/2 XX ± District = 1/2

APPLICABLE TENSOUTE DOCUMENTS

2.2 REAR BODY & CONTACT: GOLD PLATE PER ASTM B-488 OVER NICKEL PLATE PER AMS-0Q-N-290

3,1 FREQUENCY RANGE: DC-12GHz. 3,2 R,F. INSERTION LOSS: 0.15dB MAX TO 12GHz. 3,3 VSWR: 1.35:1 MAX TO 12GHz.

ELECTRICAL PERFORMANCE(S):

ν,

2.3 INSULATOR: NONE