
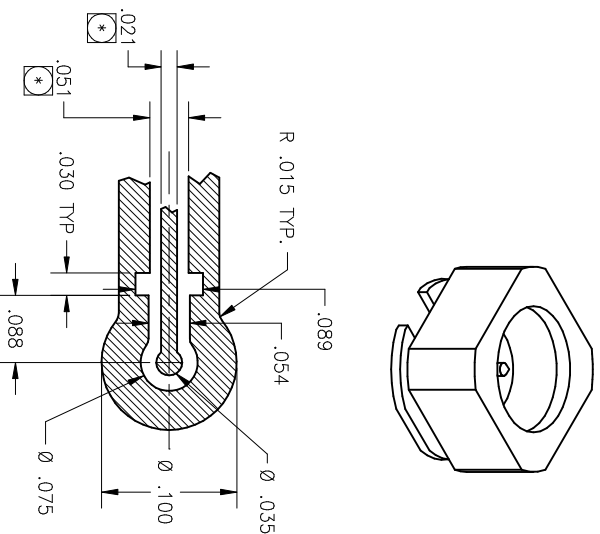
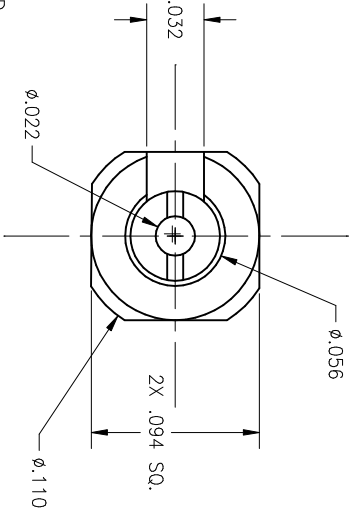


P/N	(Ø A)	INTERFACE
-1CC	.057	DETENT
-2CC	.060	NON-DETENT

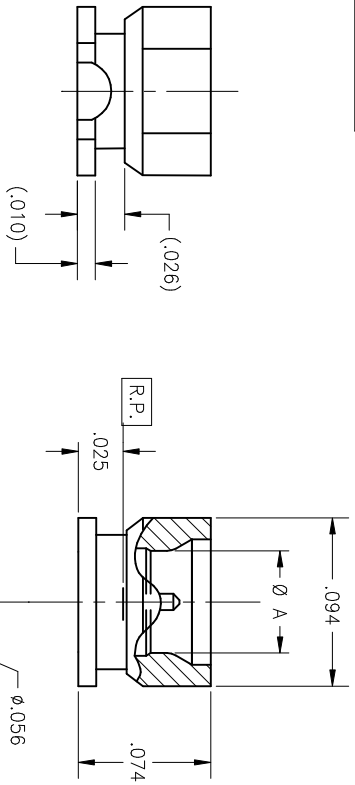

*** DIMENSIONS SHOWN ARE FOR ROGERS 4350 PCB MATERIAL. THESE DIMENSIONS MAY VARY DEPENDING ON PCB MATERIAL USED.**

MATERIAL:

BODY & CENTER CONDUCTOR:
 Brass alloy C360 per ASTM B-16
INSULATOR:
 Torton per ASTM D-5204

ELECTRICAL:

Impedance: 50 Ohms Nom.
 Freq. Range: DC TO 50 GHz
 VSWR: 1.15:1 to 26.5 GHz, 1.25: to 50 GHz
 Insertion Loss: .12 x √f GHz
 Working Voltage: 335 Vrms @ Sea Level
 Dielectric Withstand Voltage: 500 V rms
 RF Hipot Voltage: 325 Vrms Min @ 5MHz
 Corona Level: 125 Vrms @ 70,000 ft
 Insulation Resistance: 5000 Mohms
 RF Leakage: -(65 - f GHz) dB
 Contact Resistance: 4.0 Milliohms
 Center conductor: 2.0 Milliohms
 Outer conductor: 2.0 Milliohms

MECHANICAL:

Interface Dimensions:
 Consult Factory
 Connector Durability:
 100 Cycles
 Center Contact Retention:
 N/A
 Force to Engage and Disengage:
 3.5 lbs Engage (Typical Detent)
 5.0 lbs Disengage (Typical Detent)

ENVIRONMENTAL:

Temp. Range: -65°C to +165°C
 Thermal Shock:
 MIL-STD-202, Method 107, Test Cond. B
 Moisture Resistance:
 MIL-STD-202, Method 106, Insulation resistance at least 200 Megaohms within 5 minutes after removal from humidity
 Corrosion:
 MIL-STD-202, Method 101, Test Cond. B
 Vibration:
 MIL-STD-202, Method 204, Test Cond. D
 Shock:
 MIL-STD-202, Method 213, Test Cond. I

FINISH:

BODY & CENTER CONDUCTOR:
 Gold plate per ASTM B-488 over nickel plate per AMS-QQ-N-290

APPLICABLE CARLISLE IT DOCUMENTS

WORK STD	PROD INST	ASSY INST
NA	NA	NA

TOLERANCES AND NOTES EXCEPT AS NOTED

- 1. MACHINE FINISH: #2 / rms
- 2. BREAK ALL SHARP EDGES .003 MAX.
- 3. MACHINED FLATS & CHAMFERED ENDS TO BE PERPENDICULAR TO THE AXIS WITHIN .005 INCHES PER INCH.
- 4. ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN INCHES.
- 5. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY.
- 6. DIMENSIONS IN SQUARE BRACKETS ARE FOR REFERENCE ONLY.
- 7. CHAMFER ALL VIEWS 45°
- 8. CHAMFER RPS - .005
- 9. REMOVE ALL BURRS.
- 10. REMOVE ALL BURS.

NOTICE

THIS DRAWING IS A CONTROLLED DOCUMENT. PERMISSION TO REPRODUCE OR TRANSMIT IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, IS NOT TO BE GRANTED WITHOUT THE WRITTEN PERMISSION OF CARLISLE TECHNOLOGIES, INC. THIS DRAWING IS THE PROPERTY OF CARLISLE TECHNOLOGIES, INC. AND IS LOANED TO YOU FOR YOUR USE ONLY. IT IS TO BE KEPT UNDER A CONTROLLED RELATIONSHIP FOR A SPECIFIC PERIOD OF TIME. IT IS TO BE RETURNED TO CARLISLE TECHNOLOGIES, INC. AT THE END OF THE LOAN PERIOD. IT IS TO BE DESTROYED AT THE END OF THE LOAN PERIOD. IT IS TO BE KEPT UNDER A CONTROLLED RELATIONSHIP FOR A SPECIFIC PERIOD OF TIME. IT IS TO BE RETURNED TO CARLISLE TECHNOLOGIES, INC. AT THE END OF THE LOAN PERIOD. IT IS TO BE DESTROYED AT THE END OF THE LOAN PERIOD.

SEE NOTES

APPROVAL INITIALS	DATE
PCV	10/21/09

SEE NOTES

MATERIAL	DATE
PCV	10/21/09

CARLISLE Interconnect Technologies
 Long Beach, CA 90815

WMP MALE STRAIGHT SURFACE MOUNT
 SCALE: 20:1
 DATE: 03/14/11
 SHEET 1 OF 1

SIZE: 309990
 SPECIFICATION: WP350